


## PROBLEM:

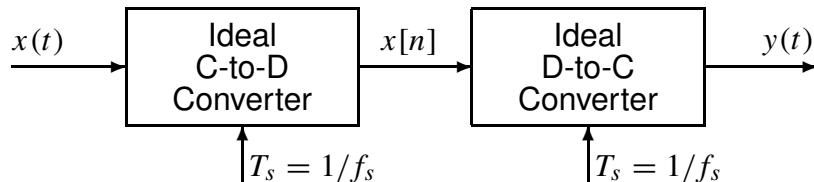


Suppose that the continuous-time input  $x(t)$  to the above system is given as

$$x(t) = \cos(9000\pi t) + \cos(7000\pi t) + \cos(2000\pi t).$$

(a) What sampling rate is required such that no aliasing occurs for  $x(t)$ ?  $f_s =$

(b) Given that  $f_s = 8,000$  samples/second, plot the frequency spectrum for  $x[n]$ .

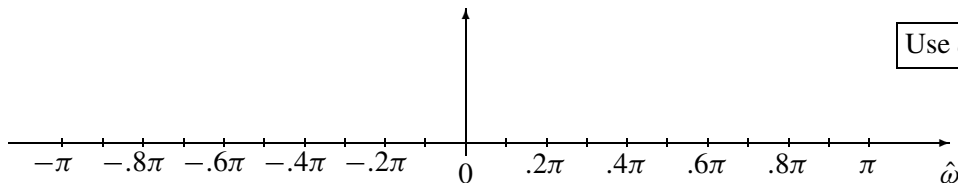

(c) Given that  $x(t) = \cos(17000\pi t + \pi)$  and  $f_s = 10000$  samples/second, write a simplified expression for the output  $y(t)$  in terms of cosine functions.