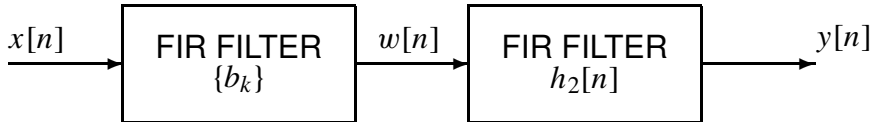
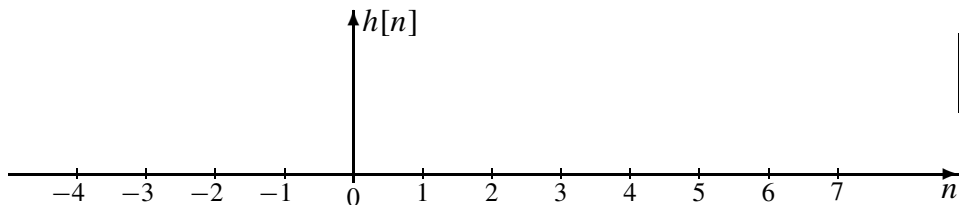


**PROBLEM:**

- (a) If the filter coefficients of the first FIR filter are  $\{b_k\} = \{0, 1, 0, -1\}$ , and the impulse response of the second FIR filter is  $h_2[n] = \delta[n] - 2\delta[n - 2] + \delta[n - 3]$ , use convolution to determine the impulse response of the overall system,  $h[n]$ . Give your answer as a plot below.

**Label Carefully**

Plot zero values also

- (b) Suppose that the overall frequency response of the cascade system (using different FIR filters from those in part (a)) is

$$\mathcal{H}(\hat{\omega}) = 2 \cos\left(\frac{1}{2}\hat{\omega}\right) e^{-j\hat{\omega}}$$

If the input signal is  $x[n] = 5 + 4 \cos(0.5\pi n)$  for  $-\infty < n < \infty$ , determine a simple mathematical expression for the overall output signal  $y[n]$ .

$y[n] =$