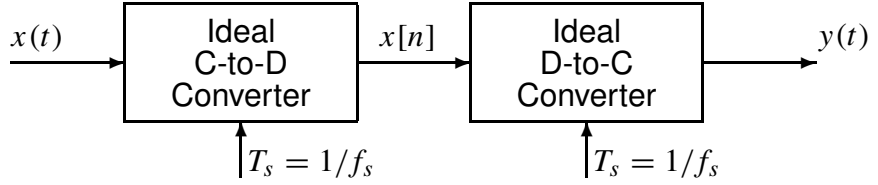


**PROBLEM:**

In all parts below, the sampling rates of the C/D and D/C converters are **equal**, and the input to the Ideal C/D converter is

$$x(t) = 8 \cos(2\pi(200)t + \pi/2) + 5 \cos(2\pi(400)t).$$

(a) If the output of the ideal D-to-C Converter is

$$y(t) = x(t) = 8 \cos(2\pi(200)t + \pi/2) + 5 \cos(2\pi(400)t),$$

what general statement can you make about the sampling frequency  $f_s$  in this case?


(b) If the sampling rate is  $f_s = 500$  samples/sec., determine the discrete-time signal  $x[n]$ , and give an expression for  $x[n]$  as a sum of cosines. *Make sure that all frequencies in your answer are positive and less than  $\pi$  radians.*

$x[n] =$

Plot the spectrum of this signal over the range of frequencies  $-\pi \leq \hat{\omega} \leq \pi$ . Make a plot for your answer, but label the frequency, amplitude and phase of each spectral component.

**Label Carefully**

Use  $\hat{\omega}$  for digital freq.

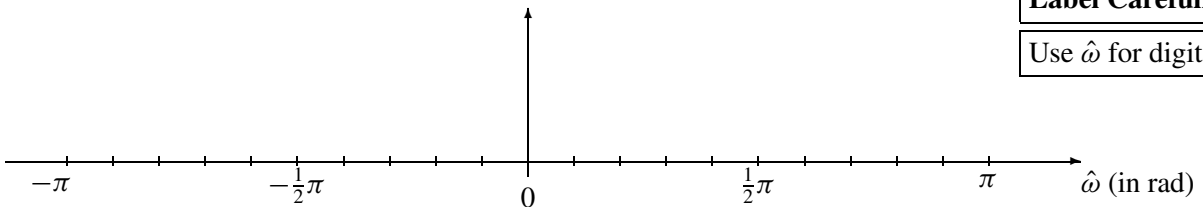

(c) If the output of the Ideal D-to-C Converter is

$$y(t) = 8 \cos(2\pi(200)t + \pi/2) + 5,$$

determine the value of the sampling frequency  $f_s$ . (Remember that the input  $x(t)$  is as defined above.)