


PROBLEM:Define $x(t)$ as

$$x(t) = 2 \cos(5\pi(t - .6)) + \sqrt{2} \cos(5\pi t + \pi/4)$$


- (a) Use phasor addition to express $x(t)$ in the form $x(t) = A \cos(\omega_0 t + \phi)$ by finding the numerical values of A and ϕ , as well as ω_0 .
- (b) Make two complex plane plots to illustrate how complex amplitudes (phasors) were used to solve part (a). On the first plot, show the two complex amplitudes being added; on the second plot, show your solution as a vector and the addition of the two complex amplitudes as vectors (head-to-tail).

Two vectors here.

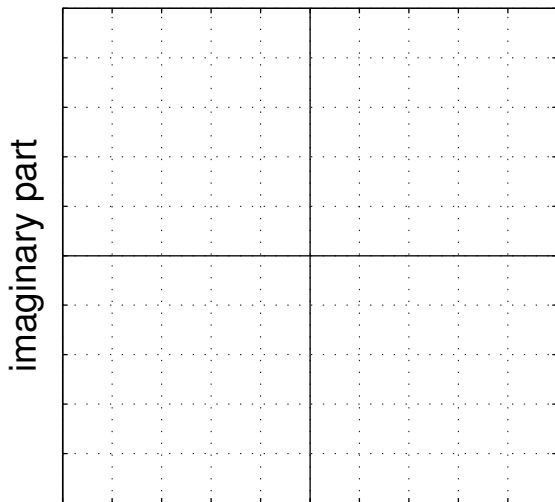

real part

Head-to-tail plot here.

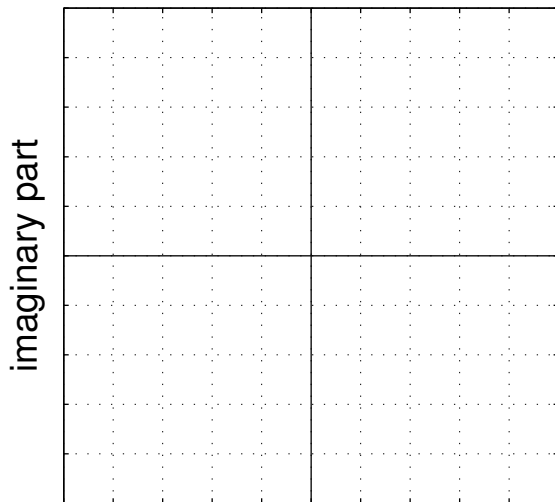

real part