


**PROBLEM:**

For each short question, pick a correct frequency and enter its letter in the answer box.

Note: Some questions might have more than one answer.


**Frequency**

- (a) If the output from an ideal C/D converter is  $x[n] = A \cos(\pi n)$ , and the sampling rate is 10000 samples/sec, then determine one possible value of the input frequency of  $x(t)$ :

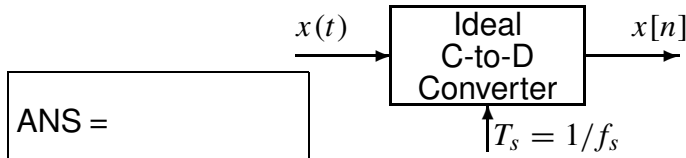

- (a) 8000 Hz  
 (b) 5000 Hz  
 (c) 4000 Hz  
 (d) 1600 Hz  
 (e) 1200 Hz

- (b) If the output from an ideal C/D converter is  $x[n] = A \cos(\pi n)$ , and the input signal  $x(t)$  defined by:  $x(t) = A \cos(5000\pi t)$  then determine one possible value of the sampling frequency of the C-to-D converter:

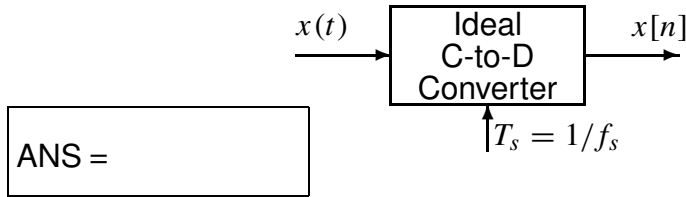

- (f) 1000 Hz  
 (g) 800 Hz  
 (h) 500 Hz  
 (i) 400 Hz

- (c) Determine the Nyquist rate for sampling the signal  $x(t)$  defined by:  $x(t) = \Re\{e^{j4000\pi t} + e^{j3000\pi t}\}$ .

ANS =