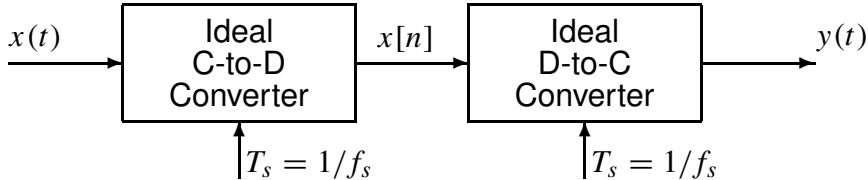


PROBLEM:

- (a) If the input to the ideal C/D converter is a sinusoid with frequency of 700 Hz, and the sampling frequency is 1000 Hz, then the output $y(t)$ is a sinusoid. Determine the frequency of the output.
- (b) Suppose that the input signal is a chirp signal defined as follows:

$$x(t) = \cos(400\pi t^2) \quad \text{for } 0 \leq t \leq 5 \text{ sec.}$$

If the sampling rate is $f_s = 1000$ Hz, then the output signal $y(t)$ will have time-varying frequency content. Draw a graph of the resulting analog *instantaneous* frequency (in Hz) versus time of the signal $y(t)$ **after reconstruction**. Hint: this could be done in MATLAB by putting a sampled chirp signal into the MATLAB function `specgram()`.