
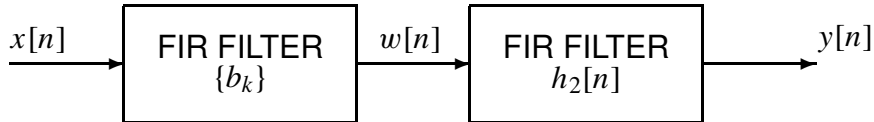


PROBLEM:

- (a) If the filter coefficients of the first FIR filter are $\{b_k\} = \{0, 1, -2, 1\}$, and the impulse response of the second FIR filter is $h_2[n] = \delta[n] + 2\delta[n - 2] + \delta[n - 3]$, use convolution to determine the impulse response of the overall system, $h[n]$. Give your answer as a plot below.

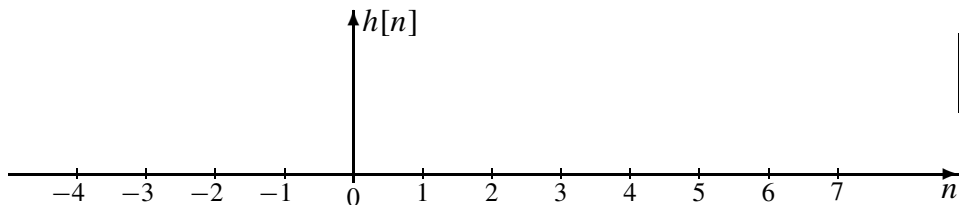

Label Carefully

Plot zero values also

- (b) Suppose that the overall frequency response of the cascade system (using different FIR filters from those in part (a)) is

$$\mathcal{H}(\hat{\omega}) = (2 + 2 \cos(\hat{\omega}))e^{-j\hat{\omega}}$$

If the input signal is $x[n] = 10 + 6 \cos(0.5\pi n + \pi/3)$ for $-\infty < n < \infty$, determine a simple mathematical expression for the overall output signal $y[n]$.

$y[n] =$
