


PROBLEM:

A cascade of two FIR discrete-time systems is depicted by the following block diagram:

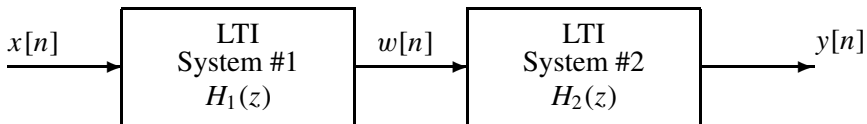

The systems are defined by the following:

$$H_1(z) = (1 + z^{-2}) \quad \text{and} \quad h_2[n] = (-0.5)^{n-1}u[n-1].$$

- (a) If the input to the first system is

$$x[n] = -\delta[n] + 2\delta[n-1] + \delta[n-2],$$

determine the output, $w[n]$, of the **first** system.

$w[n] =$

- (b) Determine the system function $H(z)$ of the overall system.

$H(z) =$

- (c) Determine the impulse response of the the overall system.

$h[n] =$