


**PROBLEM:**

A cascade of two FIR discrete-time systems is depicted by the following block diagram:

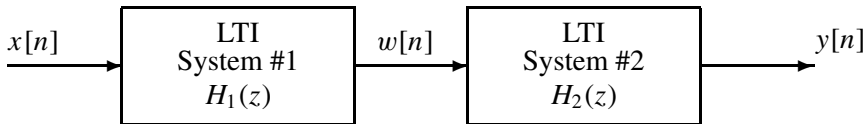

The systems are defined by the following:

$$H_1(z) = (z^{-2} - z^{-3}) \quad \text{and} \quad h_2[n] = (0.8)^{n-1}u[n-1].$$

- (a) If the input to the first system is

$$x[n] = u[n],$$

determine the output,  $w[n]$ , of the **first** system.

$$w[n] =$$

- (b) Determine the system function  $H(z)$  of the overall system.

$$H(z) =$$

- (c) Determine the impulse response of the the overall system.

$$h[n] =$$